



SYMMETRICAL

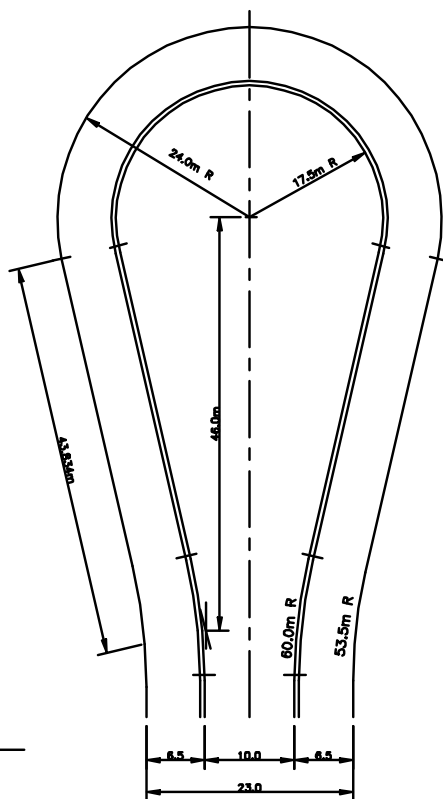

OFFSET

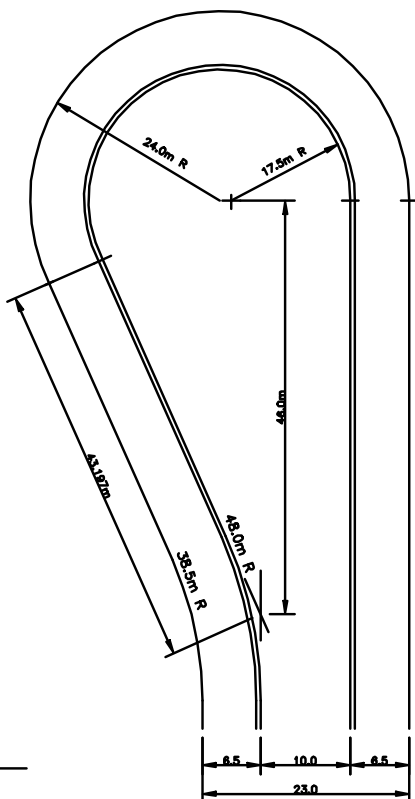

NOTES:

1. MINIMUM GUTTER SLOPE TO BE 1.00%.
2. DETAIL OF GRADING OF BULB AREAS OF CUL-DE-SACS TO BE SHOWN ON PROFILE DRAWINGS.
3. CUL-DE-SAC DRAINAGE TO BE DIRECTED TOWARDS THE BEGINING OF THE BULB.
4. ALL DIMENSIONS ARE IN MILLIMETRES OR METRES.

APPROVED	TOWNSHIP OF UXBRIDGE	DATE OF ISSUE JANUARY 1980
REVISION 1	TYPICAL CUL-DE-SAC FOR INDUSTRIAL STREETS	DRAWING No. US-219
DATE OF REVISION MARCH, 1989		